


SEE WIRING DIAGRAMS FOR IMPORTANT ADDITIONAL INFORMATION

FIXTURE INSTALLATION



SCREW SUPPLIED BRACKETS INTO PLACE. THE ADJUSTABLE MOUNT BRACKET IS SHOWN ABOVE. A FIXED MOUNT VERSION IS ALSO AVAILABLE.

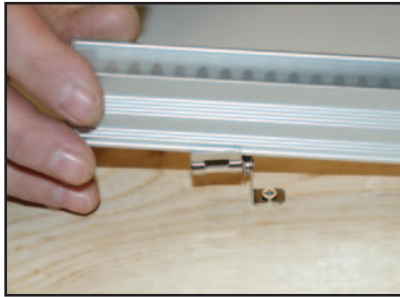


SNAP THE FIXTURES INTO PLACE. MAKE WIRING AND FIXTURE-TO-FIXTURE CONNECTIONS AS DESCRIBED BELOW.



PROJECT LINEAR BRANCH CABLE CONNECTIONS

SOME LIGHTWILD PROJECT LINEAR PRODUCTS AND/OR THEIR POWER AND CONTROL UNITS SHIP WITH FOUR INDIVIDUAL WIRES ON THE END FOR CONNECTION TO BRANCH CABLES.

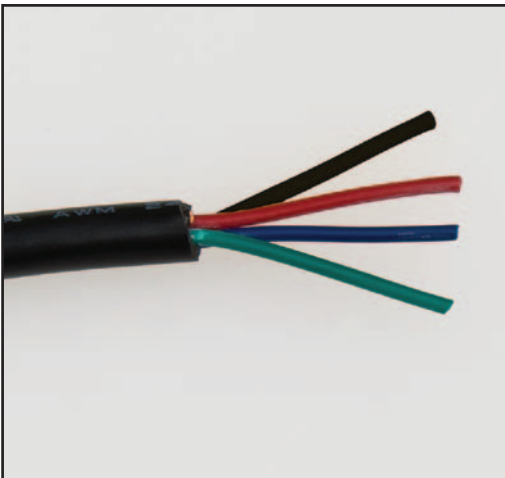

HOW TO CONNECT WHITE AND SINGLE COLOR LINEARS TO 2-CONDUCTOR BRANCH CABLE

- THE BLACK WIRE IS 24VDC POSITIVE
- ALL THREE OF THE REMAINING WIRES (RED, BLUE, GREEN) SHOULD BE CONNECTED TO THE NEGATIVE WIRE OF THE BRANCH CABLE

HOW TO CONNECT RGB COLOR-CHANGING LINEARS TO 4-CONDUCTOR BRANCH CABLE

- THE BLACK WIRE IS 24VDC POSITIVE
- THE RED WIRE IS THE RED CHANNEL
- THE BLUE WIRE IS THE BLUE CHANNEL
- THE GREEN WIRE IS THE GREEN CHANNEL

MAXIMUM CABLE LENGTHS FOR A SINGLE RUN

LOAD AT 24VDC		MAXIMUM CABLE LENGTH TO THE LAST FIXTURE IN A RUN BY WIRE SIZE						
WATTS	AMPS	#18	#16	#14	#12	#10	#8	#6
0-12	0.0-0.5	150 ft	240 ft	300 ft	300 ft	300 ft	300 ft	300 ft
12-24	0.5-1.0	75 ft	120 ft	190 ft	300 ft	300 ft	300 ft	300 ft
24-36	1.0-1.5	50 ft	80 ft	120 ft	200 ft	300 ft	300 ft	300 ft
36-48	1.5-2.0	35 ft	60 ft	95 ft	150 ft	240 ft	300 ft	300 ft
48-60	2.0-2.5	n/a	45 ft	75 ft	120 ft	190 ft	300 ft	300 ft
60-72	2.5-3.0	n/a	40 ft	60 ft	100 ft	160 ft	250 ft	300 ft
72-84	3.0-3.5	n/a	30 ft	55 ft	85 ft	130 ft	220 ft	300 ft
84-90	3.5-4.0	n/a	n/a	45 ft	75 ft	120 ft	190 ft	300 ft

* 90 WATTS IS THE MAX WATTAGE PER RUN FOR CLASS 2 INSTALLATIONS

NOTES