

► Zonal Lumen Summary

| Lumens       |             |
|--------------|-------------|
| Zone         | Warm White  |
| 0-90         | 0.06        |
| 90-100       | 1.70        |
| 100-110      | 4.39        |
| 110-120      | 6.83        |
| 120-130      | 8.63        |
| 130-140      | 9.41        |
| 140-150      | 9.04        |
| 150-160      | 7.51        |
| 160-170      | 4.95        |
| 170-180      | 1.73        |
| <b>Total</b> | <b>54.2</b> |

Photometric tests performed on the 2x12-inch (55x300 mm) length of the LightWild Tile fixture.

► Luminaire Specifications

- Lens:** Tempered Glass, Frosted
- Housing:** Stainless Steel
- Source:** Surface Mount LEDs
- Distribution:** Symmetric Direct Illumination
- CCT:** 3000K
- Beam Angle:** 120° (50% Peak Intensity)



► Luminous Flux (Stabilized)

| Color      | Lumens (lm) | Power (Watts) | Efficacy (lm/W) |
|------------|-------------|---------------|-----------------|
| Warm White | 54.2        | 2.9           | 18.7            |

Note: Efficacy figures are for the total luminaire. Individual light sources are not represented.


► Direct Illuminance Perpendicular to Luminaire

| Color      | Footcandles |      |      |       |
|------------|-------------|------|------|-------|
|            | 3 ft        | 6 ft | 9 ft | 12 ft |
| Warm White | 2.25        | 0.56 | 0.25 | 0.14  |

| Color      | Lux   |      |      |      |
|------------|-------|------|------|------|
|            | 1 m   | 2 m  | 3 m  | 4 m  |
| Warm White | 18.23 | 4.56 | 2.03 | 1.14 |

► Candela Plot

Quadralaterally Symmetric

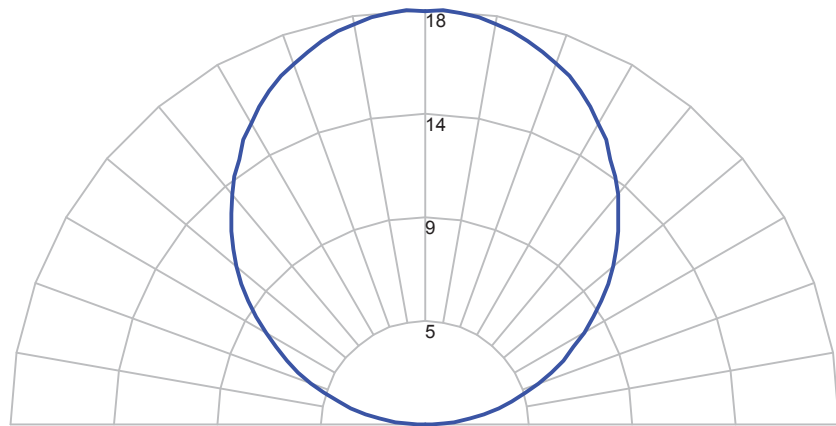

Download electronic IES data at [www.lightwild.com](http://www.lightwild.com).