

► Zonal Lumen Summary

Zone	Lumens	
	Cool White	
0-90	0.04	
90-100	1.26	
100-110	3.25	
110-120	5.06	
120-130	6.40	
130-140	6.98	
140-150	6.70	
150-160	5.57	
160-170	3.67	
170-180	1.28	
Total	40.2	

Photometric tests performed on the 4x4-inch (100x100 mm) LightWild Tile fixture.

► Luminaire Specifications

- Lens:** Tempered Glass, Frosted
- Housing:** Stainless Steel
- Source:** Surface Mount LEDs
- Distribution:** Symmetric Direct Illumination
- CCT:** 4000K
- Beam Angle:** 120° (50% Peak Intensity)




► Luminous Flux (Stabilized)

Color	Lumens (lm)	Power (Watts)	Efficacy (lm/W)
Cool White	40.2	2.9	13.9

Note: Efficacy figures are for the total luminaire. Individual light sources are not represented.

► Candela Plot

Quadralaterally Symmetric

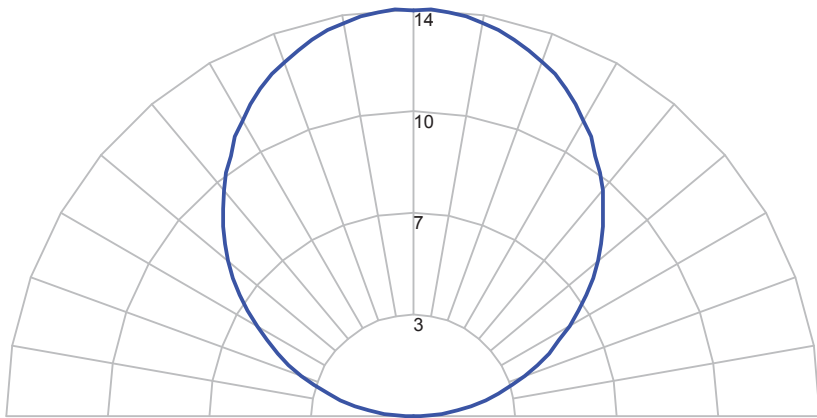

► Direct Illuminance Perpendicular to Luminaire

Color	Footcandles			
	3 ft	6 ft	9 ft	12 ft
Cool White	1.5	0.38	0.17	0.09

Color	Lux			
	1 m	2 m	3 m	4 m
Cool White	13.52	3.38	1.5	0.85

Download electronic IES data at www.lightwild.com.