

► Zonal Lumen Summary

Lumens	
Zone	Warm White
0-90	0.04
90-100	1.13
100-110	2.92
110-120	4.55
120-130	5.75
130-140	6.27
140-150	6.02
150-160	5.00
160-170	3.30
170-180	1.15
Total	36.1

► Luminous Flux (Stabilized)

Color	Lumens (lm)	Power (Watts)	Efficacy (lm/W)
Warm White	36.1	2.9	12.4

Note: Efficacy figures are for the total luminaire. Individual light sources are not represented.

► Direct Illuminance Perpendicular to Luminaire

Color	Footcandles			
	3 ft	6 ft	9 ft	12 ft
Warm White	1.35	0.34	0.15	0.08

Color	Lux			
	1 m	2 m	3 m	4 m
Warm White	12.51	3.04	1.35	0.75

Photometric tests performed on the 4x4-inch (100x100 mm) LightWild Tile fixture.


► Luminaire Specifications

- Lens:** Tempered Glass, Frosted
- Housing:** Stainless Steel
- Source:** Surface Mount LEDs
- Distribution:** Symmetric Direct Illumination
- CCT:** 3000K
- Beam Angle:** 120° (50% Peak Intensity)



► Candela Plot

Quadralaterally Symmetric

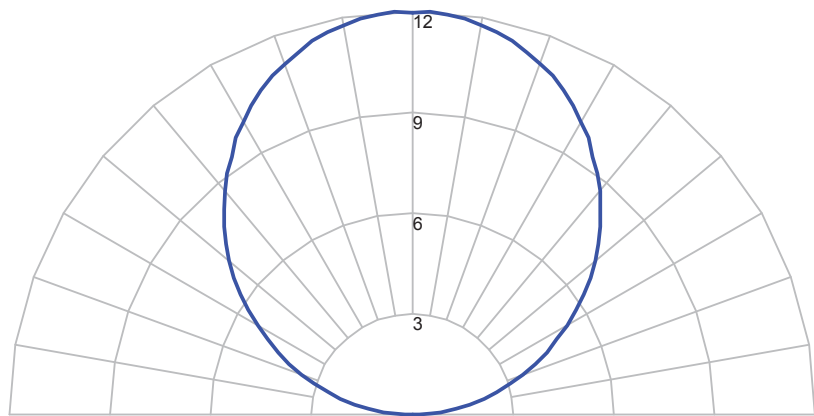

Download electronic IES data at www.lightwild.com.