





SERIES A INTEGRAL POWER SUPPLY

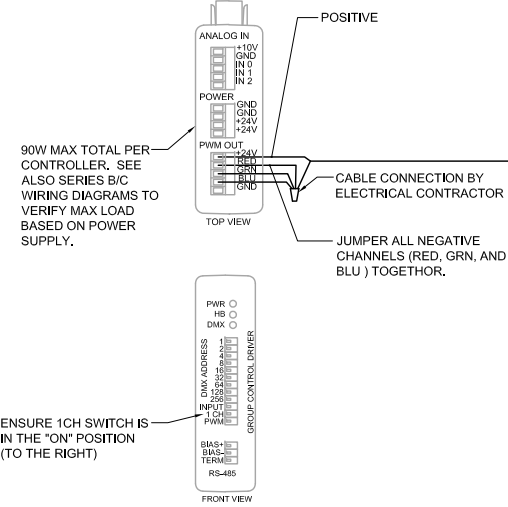

SERIES A PS01/PS03 POWER SUPPLY

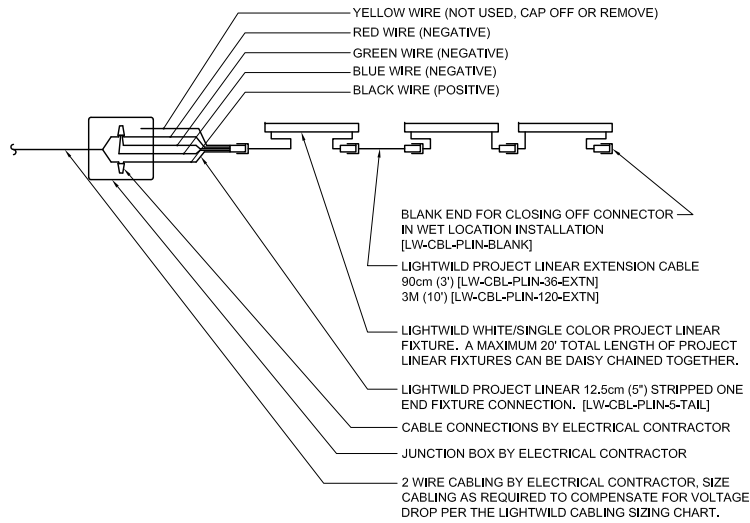

SERIES B/C LIGHTWILD LED LIGHTING CONTROLLER

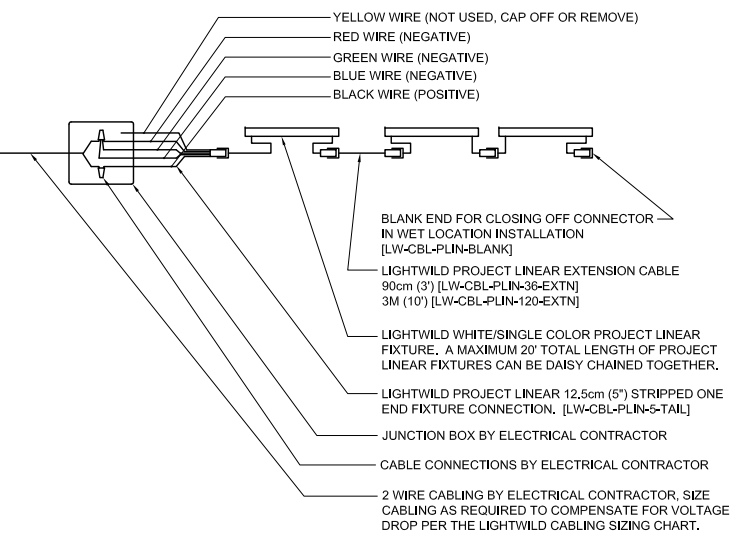

LIGHTWILD MAXIMUM CABLE LENGTH FOR A SINGLE RUN

LOAD AT 24VDC	WATTS	AMPS	MAXIMUM CABLE LENGTH TO THE LAST FIXTURE IN A CABLE RUN BY WIRE SIZE
0-12	0.0-0.5	#18	#14
12-24	0.5-1.0	#16	#12
24-36	1.0-1.5	#14	#10
36-48	1.5-2.0	#12	#8
48-60	2.0-2.5	N/A	N/A
60-72	2.5-3.0	N/A	N/A
72-84	3.0-3.5	N/A	N/A
84-90*	3.5-4.0	N/A	N/A

*90 WATTS IS THE MAX WATTAGE PER RUN FOR CLASS 2 INSTALLATIONS

LEGEND

	PREINSTALLED
	FIELD INSTALLED
	PREINSTALLED OPTION
	FIELD INSTALLED OPTION

WIRING DIAGRAMS ARE GENERIC FOR MULTIPLE PART NUMBERS. EQUIPMENT AND OPTIONS SHOWN ON THE DIAGRAM MAY NOT BE INCLUDED AS PART OF THE EQUIPMENT PROVIDED.

FIXTURES ARE SUBJECT TO CHANGE WITHOUT NOTICE.
 LIGHTWILD IS THE OWNER OF ALL COPYRIGHT AND ALL OTHER INTELLECTUAL PROPERTY RIGHTS IN THIS DRAWING AND SHALL ONLY BE USED FOR PURPOSES SET OUT AND APPROVED BY LIGHTWILD. ANY ATTEMPT TO COPY OR DISTRIBUTE THIS DOCUMENT, IN WHOLE OR IN PART, OR TO USE THIS DOCUMENT WITHOUT THE EXPRESS WRITTEN APPROVAL OF LIGHTWILD IS PROHIBITED. COPYRIGHT © 2008 LIGHTWILD

LIGHTWILD
 7320 W 162ND ST.
 OVERLAND PARK, KS 66085
 913-851-3000

PART NUMBERS
 LW-PLIN-WW/CW/R/G/B/A-XX

WIRING DIAGRAM
 PROJECT LINEAR
 WHITE/SINGLE COLOR
 1/8" SCALE

REV: 05 DATE: 10/28/2011
 SCALE: NONE SHEET: 1 OF 1